

输出功率: 约2.0~30.0W

直流无刷电机

典型应用: 医疗器械
精密仪器
家用电器
商业设备


OUTPUT:APPROX 2.0~30.0W

Brushless DC Motor

Typical Applications: Medical Instruments
Precision Instrument
Household Appliances
Business Equipment

1.OUTLINE DRAWING:

UNIT:MM

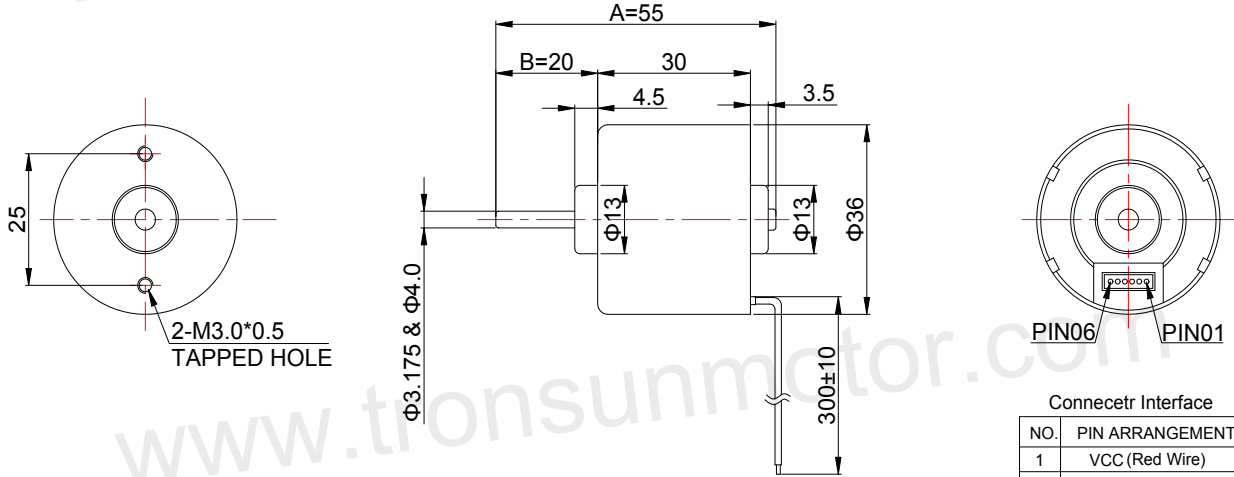

Customizable Parameters:

- Length A and B
- Electric Performance

WEIGHT: 110g(Approx)

View:



Connectr Interface

NO.	PIN ARRANGEMENT
1	VCC (Red Wire)
2	FG(Green Wire)
3	CW/CCW(Yellow Wire)
4	GND(Black Wire)
5	PWM(Blue Wire)
6	BRAKE(White Wire)

2.MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL V	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN.m	OUTPUT W	TORQUE g.cm	TORQUE mN.m	CURRENT A
BL3630I-125700	8.0~15.0	12.0	5700	0.18	4670	0.82	121	11.87	5.80	675	66.24	3.71
BL3630I-128100	8.0~15.0	12.0	8100	0.34	6460	1.34	151	14.82	10.00	750	73.60	5.31
BL3630I-249400	8.0~26.0	24.0	9400	0.19	7680	0.82	168	16.49	13.23	925	90.78	3.82

